
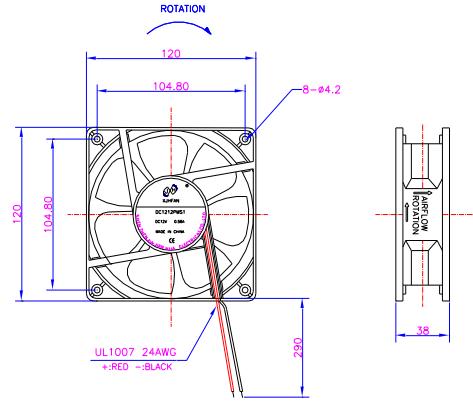


20 × 120 × 38 mm



Bearing Type: Ball/Sleeve bearing

Air Flow: 83~119CFM

XJHFAN

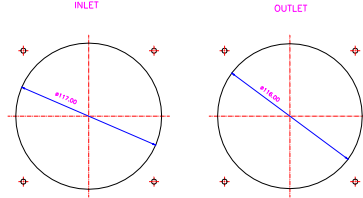

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1212PMS1	12	0.56	6.7	S	3000	118	0.32	45
DC1212PMS2	12	0.43	5.1	S	2700	97	0.24	41
DC1212PMS3	12	0.27	3.2	S	2300	83	0.18	34
DC1212PMB1	12	0.56	6.7	B	3100	119	0.33	45
DC1212PMB2	12	0.43	5.1	B	2800	98	0.25	41
DC1212PMB3	12	0.27	3.2	B	2400	84	0.19	34
DC2412PMS1	24	0.33	7.9	S	3000	118	0.32	45
DC2412PMS2	24	0.25	6	S	2700	97	0.24	41
DC2412PMS3	24	0.18	4.2	S	2300	83	0.18	34
DC2412PMB1	24	0.33	7.9	B	3100	119	0.33	45
DC2412PMB2	24	0.25	6	B	2800	98	0.25	41
DC2412PMB3	24	0.18	4.2	B	2400	84	0.19	34

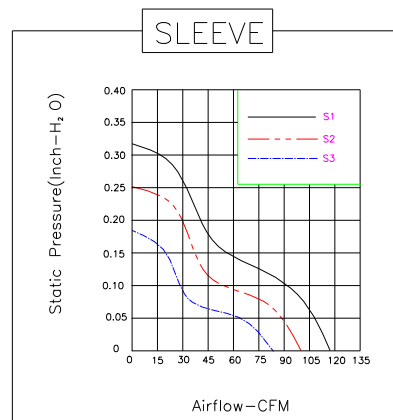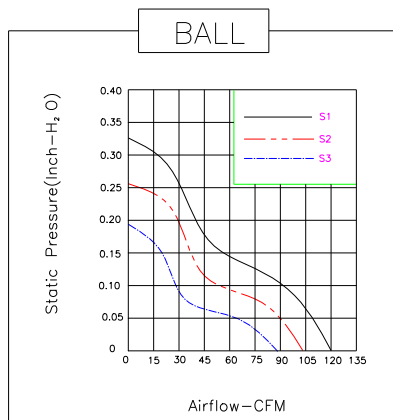

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼

电话：0755-23735300 13828711071 18948738489

传真：0755-89699793



网址：www.fanon.cn

120×120×25 mm



XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 60~85CFM

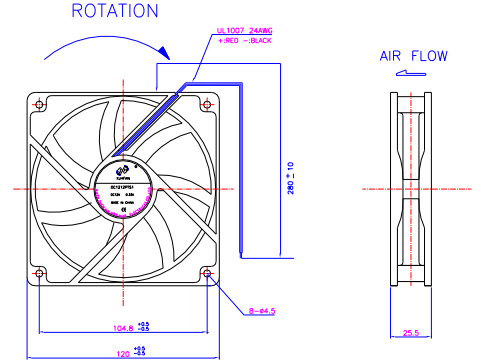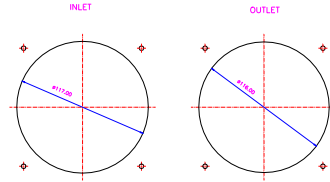

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1212PTS1	12	0.33	4.0	S	2200	83	0.25	40
DC1212PTS2	12	0.24	2.8	S	1800	70	0.20	36
DC1212PTS3	12	0.14	1.6	S	1500	60	0.17	30
DC1212PTB1	12	0.33	4.0	S	2250	85	0.26	42
DC1212PTB2	12	0.24	2.8	S	1850	72	0.21	37
DC1212PTB3	12	0.14	1.6	S	1600	65	0.19	32
DC2412PTS1	24	0.20	4.8	S	2200	83	0.25	40
DC2412PTS2	24	0.12	2.8	S	1800	70	0.20	36
DC2412PTS3	24	0.07	1.6	S	1500	60	0.17	30
DC2412PTB1	24	0.20	4.8	B	2250	85	0.26	42
DC2412PTB2	24	0.12	2.8	B	1850	72	0.21	37
DC2412PTB3	24	0.07	1.6	B	1600	65	0.19	32

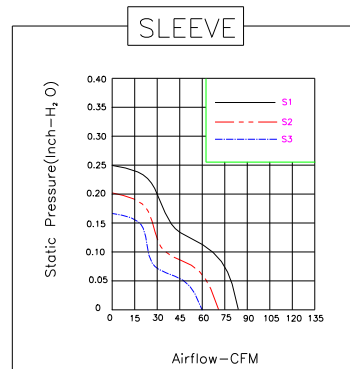
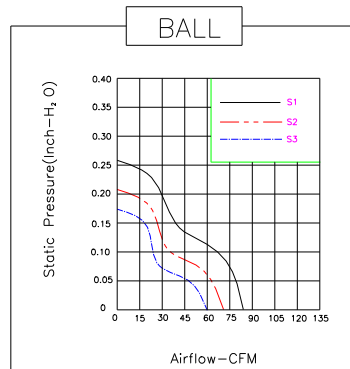


92×92×25 mm



XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 39~50CFM

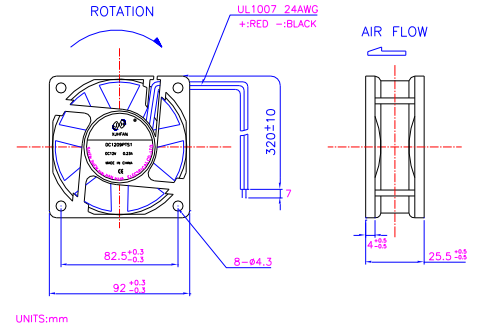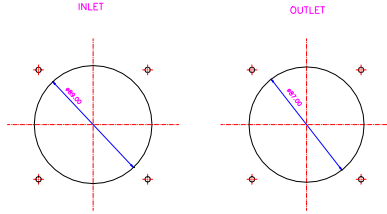

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1209PTS1	12	0.22	2.6	S	2500	44	0.14	35
DC1209PTS2	12	0.21	2.5	S	2400	43	0.14	34
DC1209PTS3	12	0.14	1.7	S	2100	39	0.11	30
DC1209PTB1	12	0.21	2.5	B	2700	48	0.17	37
DC1209PTB2	12	0.20	2.4	B	2600	46	0.16	36
DC1209PTB3	12	0.13	1.6	B	2300	41	0.12	32
DC2409PTS1	24	0.14	3.4	S	2800	49	0.17	37
DC2409PTS2	24	0.09	2.2	S	2500	44	0.15	34
DC2409PTS3	24	0.07	1.7	S	2100	39	0.11	30
DC2409PTB1	24	0.14	3.4	B	3000	50	0.20	38
DC2409PTB2	24	0.09	2.2	B	2600	45	0.16	36
DC2409PTB3	24	0.07	1.7	B	2300	41	0.12	32

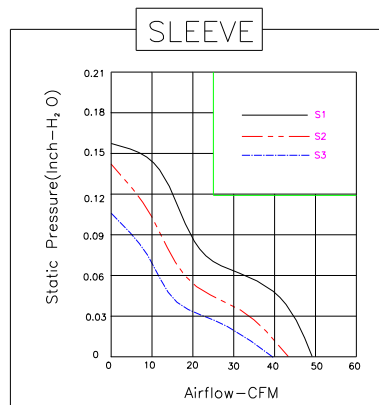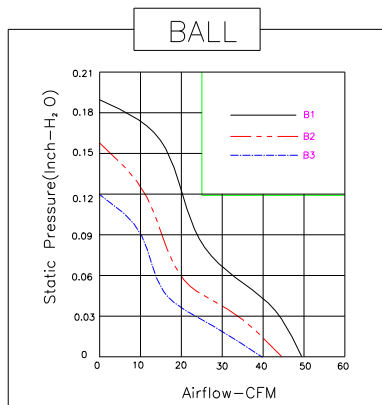

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼

电话：0755-23735300 13828711071 18948738489

传真：0755-89699793



网址：www.fanon.cn

80×80×25 mm

XJHFAN


Bearing Type: Ball/Sleeve bearing

Air Flow: 28~42CFM

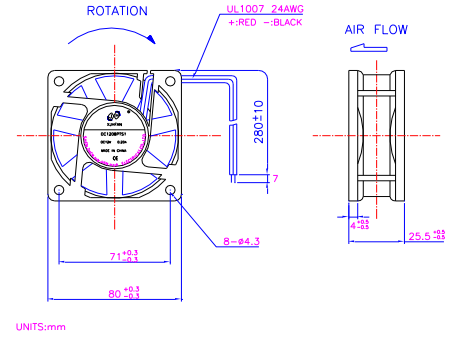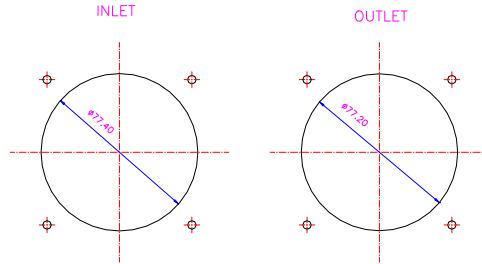

UNITS:mm

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1208PTS1	12	0.20	2.4	S	2850	37	0.17	33
DC1208PTS2	12	0.19	2.3	S	2700	36	0.16	30
DC1208PTS3	12	0.11	1.4	S	2300	31	0.12	26
DC1208PTB1	12	0.19	2.3	B	3000	39	0.18	35
DC1208PTB2	12	0.17	2.1	B	2900	38	0.17	34
DC1208PTB3	12	0.11	1.4	B	2500	33	0.13	29
DC2408PTS1	24	0.11	2.6	S	3000	39	0.18	35
DC2408PTS2	24	0.08	1.9	S	2650	34	0.16	32
DC2408PTS3	24	0.06	1.5	S	2200	29	0.11	26
DC2408PTB1	24	0.11	2.6	B	3200	42	0.23	37
DC2408PTB2	24	0.08	1.9	B	2800	35	0.20	31
DC2408PTB3	24	0.06	1.5	B	2500	33	0.13	29

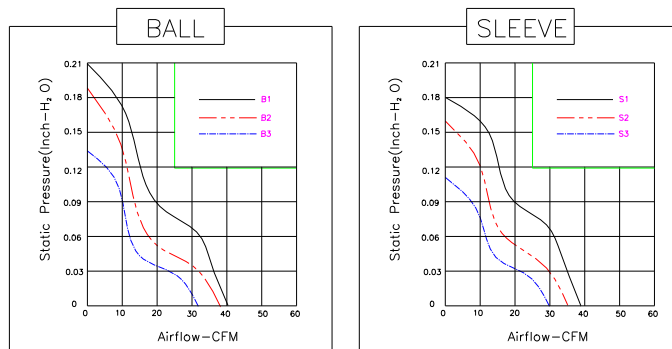

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼

电话：0755-23735300 13828711071 18948738489

传真：0755-89699793



网址：www.fanon.cn

60×60×25 mm


Bearing Type: Ball/Sleeve bearing

Air Flow: 17~21CFM

XJHFAN

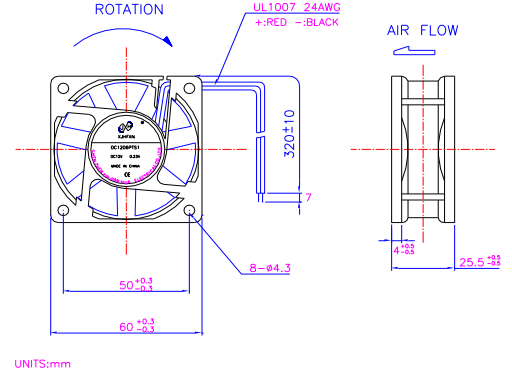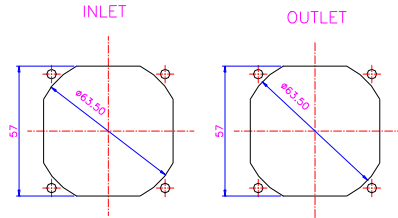

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1206PTS1	12	0.16	1.9	S	4300	22	0.20	34
DC1206PTS2	12	0.11	1.3	S	3700	18	0.15	30
DC1206PTS3	12	0.07	0.8	S	3100	16	0.10	26
DC1206PTB1	12	0.17	2.0	B	4300	22	0.20	34
DC1206PTB2	12	0.11	1.3	B	3700	18	0.15	30
DC1206PTB3	12	0.07	0.8	B	3100	16	0.10	26
DC2406PTS1	24	0.11	2.6	S	4300	22	0.20	34
DC2406PTS2	24	0.08	1.9	S	3700	18	0.15	30
DC2406PTS3	24	0.06	1.4	S	3100	16	0.10	26
DC2406PTB1	24	0.11	2.6	B	4300	22	0.20	34
DC2406PTB2	24	0.08	1.9	B	3700	18	0.15	30
DC2406PTB3	24	0.06	1.4	B	3100	16	0.10	26

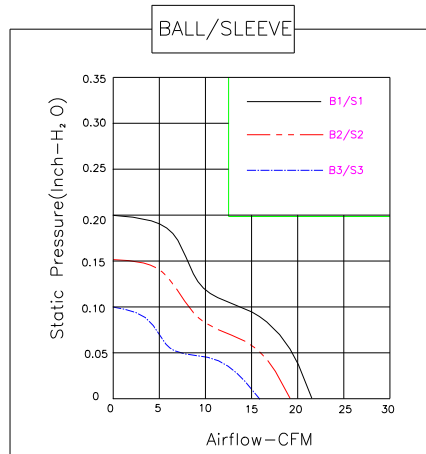


地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼
电话：0755-23735300 13828711071 18948738489
传真：0755-89699793
网址：www.fanon.cn

60×60×20 mm


XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 15~22CFM

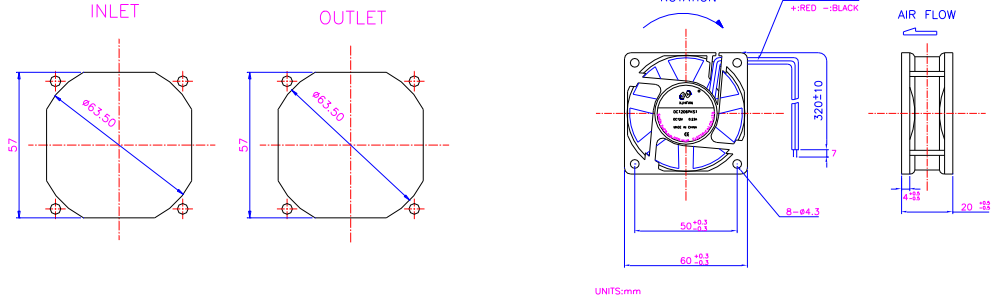

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1206PKS1	12	0.15	1.8	S	4300	22	0.17	33
DC1206PKS2	12	0.09	1.1	S	3600	18	0.14	28
DC1206PKS3	12	0.07	0.8	S	3200	15	0.10	26
DC1206PKB1	12	0.15	1.8	B	4300	22	0.17	33
DC1206PKB2	12	0.09	1.1	B	3600	18	0.14	28
DC1206PKB3	12	0.07	0.8	B	3200	15	0.10	26
DC2406PKS1	24	0.15	1.8	S	4300	22	0.17	33
DC2406PKS2	24	0.09	1.1	S	3600	18	0.14	28
DC2406PKS3	24	0.07	0.8	S	3200	15	0.10	26
DC2406PKB1	24	0.15	1.8	B	4300	22	0.17	33
DC2406PKB2	24	0.09	1.1	B	3600	18	0.14	28
DC2406PKB3	24	0.07	0.8	B	3200	15	0.10	26


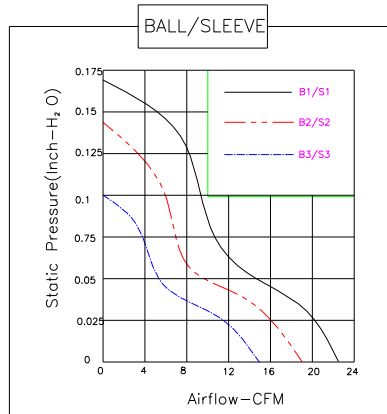


地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼
 电话：0755-23735300 13828711071 18948738489
 传真：0755-89699793
 网址：www.fanon.cn


60×60×15 mm

Bearing Type: Ball/Sleeve bearing

Air Flow: 15~21CFM

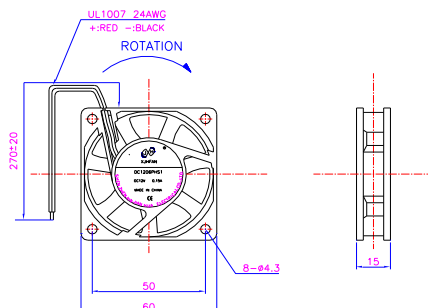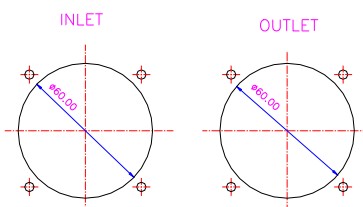

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC0506PHS2	5	0.38	1.9	S	4000	17.5	0.135	32
DC0506PHS3	S	0.24	1.2	S	3300	14.5	0.11	27
DC0506PHB2	5	0.38	1.9	B	4000	17.5	0.135	32
DC0506PHB3	5	0.24	1.2	B	3300	14.5	0.11	27
DC1206PHS1	12	0.15	1.8	S	4300	21	0.175	37
DC1206PHS2	12	0.09	1.1	S	3800	18	0.14	32
DC1206PHS3	12	0.06	0.7	S	3000	15	0.12	26
DC1206PHB1	12	0.15	1.8	B	4300	21	0.175	37
DC1206PHB2	12	0.09	1.1	B	3800	18	0.14	32
DC1206PHB3	12	0.06	0.7	B	3000	15	0.12	26

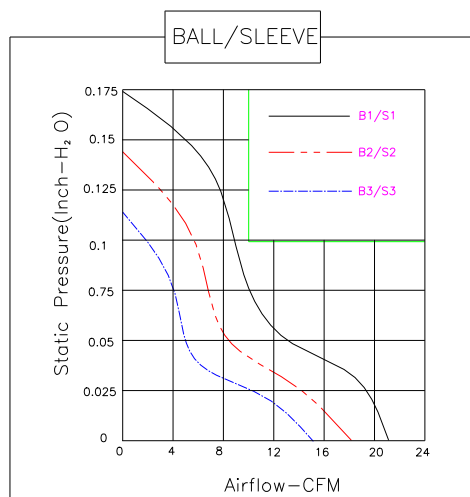


地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼
 电话：0755-23735300 13828711071 18948738489
 传真：0755-89699793
 网址：www.fanon.cn

60×60×10 mm


XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 14~19CFM

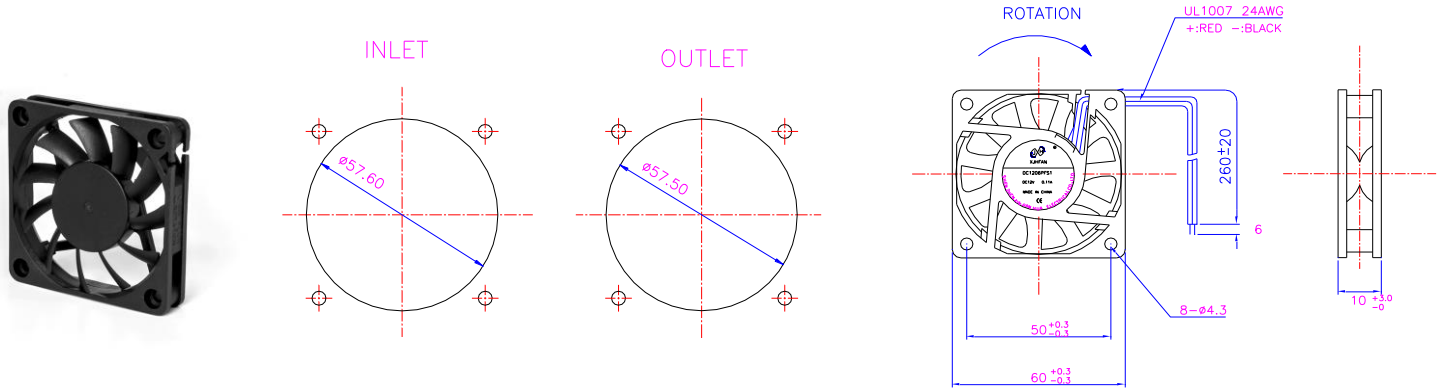

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1206PFS1	12	0.11	1.4	S	5200	16.5	0.17	36
DC1206PFS2	12	0.08	1.0	S	4300	14	0.12	35
DC1206PFS3	12	0.06	0.8	S	3600	11	0.07	29
DC1206PFB1	12	0.11	1.4	B	5200	16.5	0.17	36
DC1206PFB2	12	0.08	1.0	B	4300	14	0.12	35
DC1206PFB3	12	0.06	0.8	B	3600	11	0.07	29

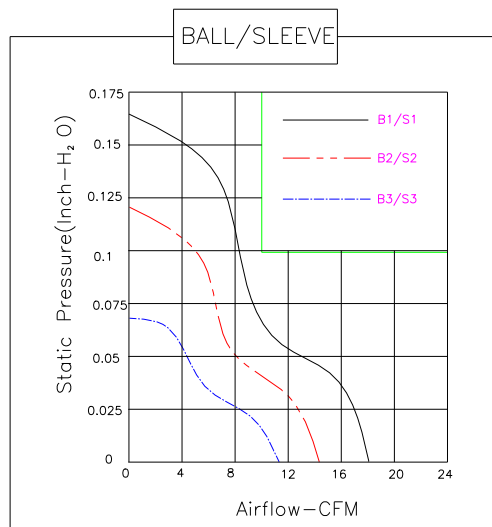

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼

电话：0755-23735300 13828711071 18948738489

传真：0755-89699793



网址：www.fanon.cn

40×40×20 mm


XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 6~10CFM

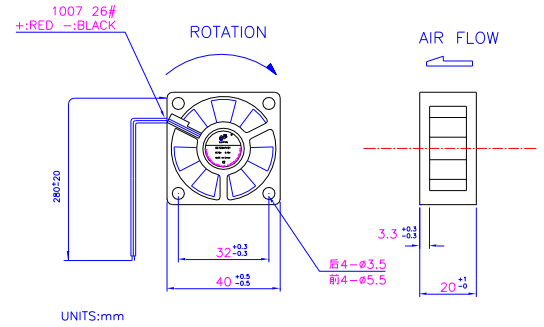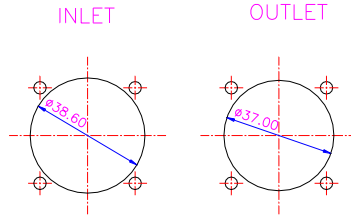

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC1204PKS1	12	0.10	1.2	S	7200	8.5	0.21	26
DC1204PKS2	12	0.06	0.8	S	6200	7.5	0.16	22
DC1204PKS3	12	0.06	0.7	S	5200	6.3	0.11	19
DC1204PKB1	12	0.10	1.2	B	7400	9	0.22	28
DC1204PKB2	12	0.06	0.8	B	6500	8	0.17	23
DC1204PKB3	12	0.05	0.6	B	5400	6.5	0.12	20
DC2404PKS2	24	0.05	1.2	S	6000	6.5	0.12	20
DC2404PKS3	24	0.03	0.8	S	4500	5.2	0.08	23
DC2404PKB2	24	0.04	1.0	B	6500	8	0.17	23
DC2404PKB3	24	0.03	0.7	B	5000	6	0.11	21

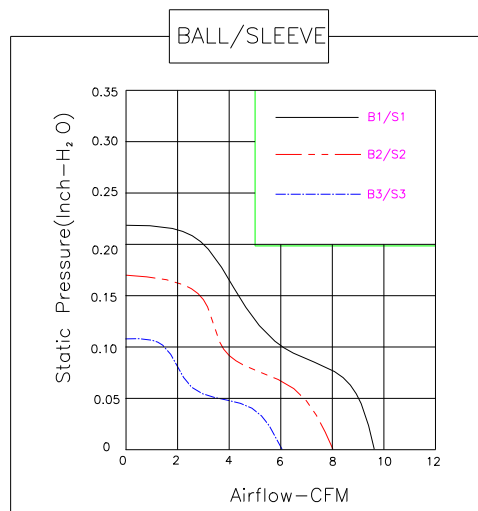


地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼
电话：0755-23735300 13828711071 18948738489
传真：0755-89699793
网址：www.fanon.cn

40×40×10 mm


XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 5~9CFM

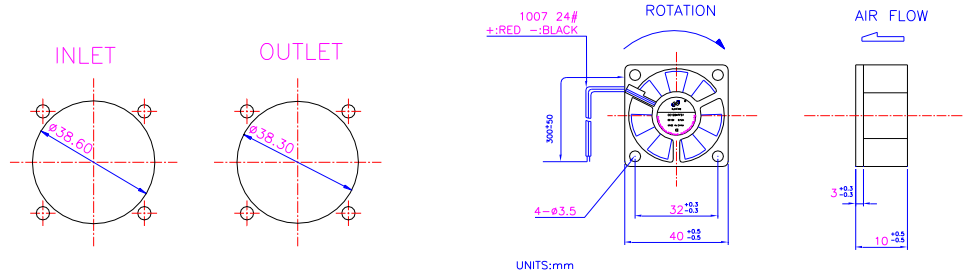

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC0504PFS1	5	0.20	1.0	S	7000	7.0	0.16	28
DC0504PFS2	5	0.18	0.9	S	5500	4.9	0.11	26
DC0504PFS3	5	0.10	0.5	S	4200	4.5	0.09	23
DC0504PFB1	5	0.20	1.0	B	7500	7.5	0.17	29
DC0504PFB2	5	0.18	0.9	B	6500	6.5	0.15	27
DC0504PFB3	5	0.10	0.5	B	5200	4.6	0.10	24
DC1204PFS1	12	0.12	1.4	S	7400	7.3	0.17	29
DC1204PFS2	12	0.09	1.1	S	5500	4.9	0.11	26
DC1204PFS3	12	0.06	0.7	S	4200	4.2	0.08	23
DC1204PFB1	12	0.11	1.4	B	8400	8.3	0.19	35
DC1204PFB2	12	0.09	1.1	B	6600	6.5	0.15	28
DC1204PFB3	12	0.05	0.6	B	5200	4.7	0.10	25

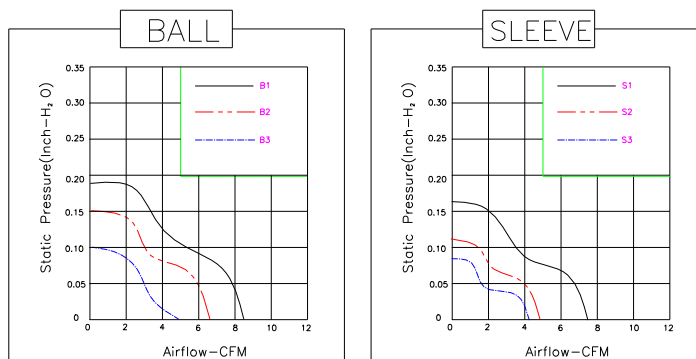


地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼
 电话：0755-23735300 13828711071 18948738489
 传真：0755-89699793
 网址：www.fanon.cn

50×50×10 mm


XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 10~12CFM

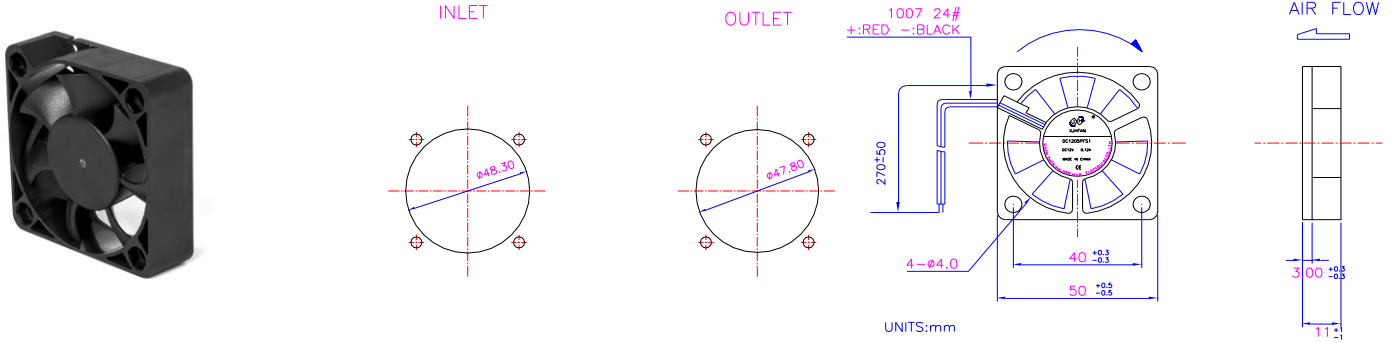

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC0505PFS1	5	0.20	1.0	S	5200	12	0.12	32
DC0505PFS2	5	0.13	0.65	S	4200	10	0.10	30
DC0505PFB1	5	0.20	1.0	B	5200	12	0.12	32
DC0505PFB2	5	0.13	0.65	B	4200	10	0.10	30
DC1205PFS1	12	0.12	1.4	S	5200	12	0.12	32
DC1205PFS2	12	0.10	1.1	S	4200	10	0.10	30
DC1205PFB1	12	0.12	1.4	B	5200	12	0.12	32
DC1205PFB2	12	0.10	1.1	B	4200	10	0.10	30

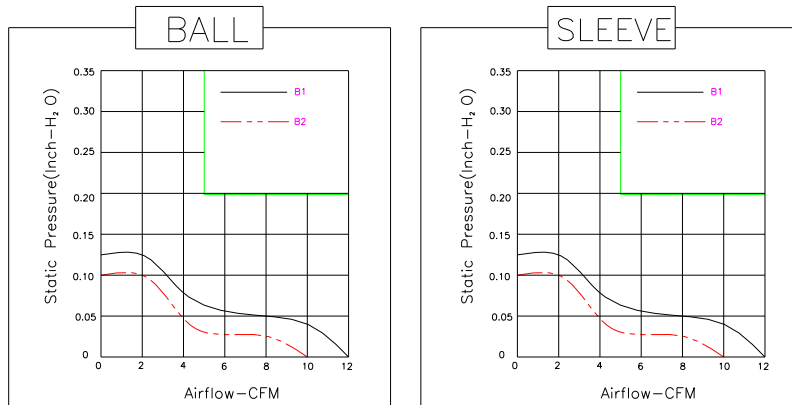

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号 3 楼

电话：0755-23735300 13828711071 18948738489

传真：0755-89699793



网址：www.fanon.cn

40×40×7 mm

XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 5~9CFM

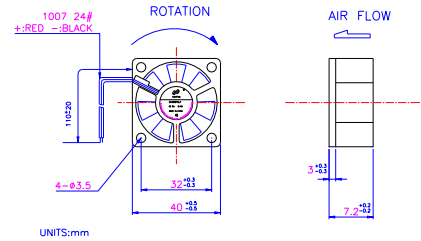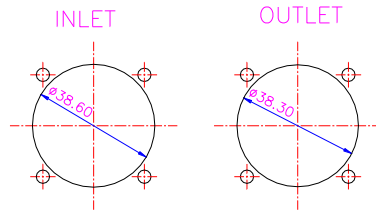

编号 Model	电压 Rating Voltage(VDC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	风压 Static Pressure (Inch-H ₂ O)	噪声 Noise (dBA)
DC054007LS1	5	0.12	0.6	S	4500	2.6	0.04	24
DC054007HS2	5	0.18	0.9	S	6000	3.8	0.08	30
DC054007XS3	5	0.25	1.25	S	8000	4.7	0.12	35
DC124007LS1	12	0.05	0.6	S	4500	2.6	0.04	24
DC124007HS2	12	0.07	0.84	S	6000	3.8	0.08	30
DC124007SS3	12	0.10	1.2	S	8000	4.7	0.12	35