



深圳市鑫晋丰科技有限公司

深圳市鑫建华电机厂


XJH40150

Bearing Type: Ball/Sleeve bearing

Air Flow: 80~90CFM



XJHFAN

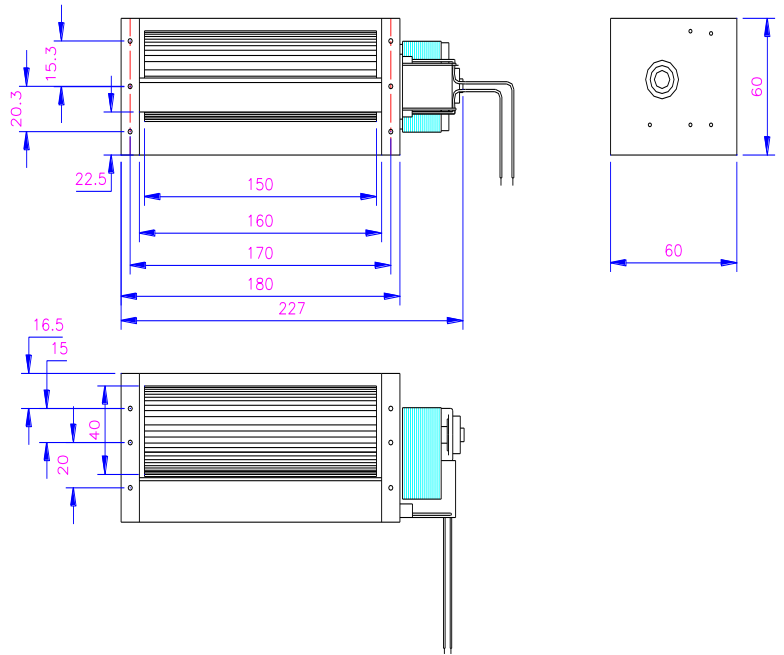

规格型号 P/N	电压 Rating Voltage(VAC)	频率 Frequency (Hz)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	噪声 Noise (dBA)
XJH40150-110	110	60	0.25	14	S	2200	90	41
XJH40150-220	220	50	0.12	11	S	2000	80	40
XJH40150-110	110	60	0.25	14	B	2200	90	41
XJH40150-220	220	50	0.12	11	B	2000	80	40

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号

电话：0755-23735300 13828711071 18948738489

传真：0755-89699793

网址：www.fanon.cn