


# XJH40190

Bearing Type: Ball/Sleeve bearing

Air Flow: 43 CFM

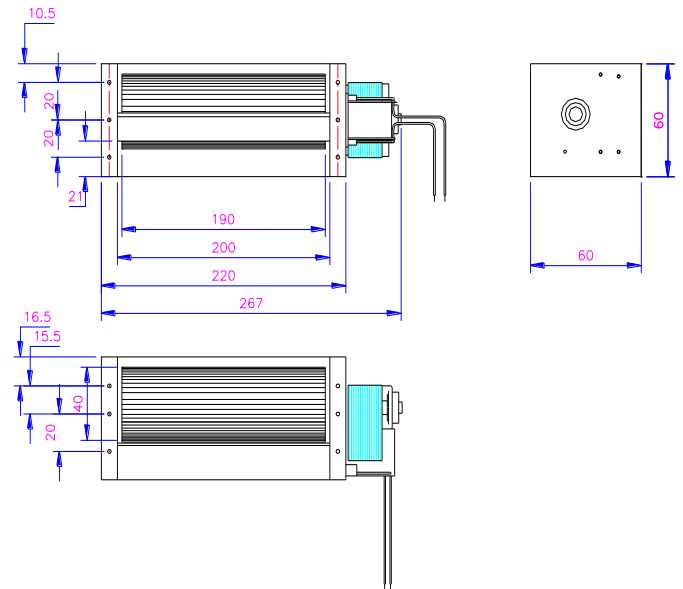

规格型号 P/N	电压 Rating Voltage(VAC)	频率 Frequency (Hz)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	噪声 Noise (dBA)
XJH40190-110	110	60	0.28	15	S	2200	43	37
XJH40190-220	220	50	0.13	12	S	2000	39	35
XJH40190-110	110	60	0.28	15	B	2200	43	37
XJH40190-220	220	50	0.13	12	B	2000	39	35

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号  
电话：0755-23735300 13828711071 18948738489  
传真：0755-89699793  
网址：www.fanon.cn