


XJH4090

XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 30CFM

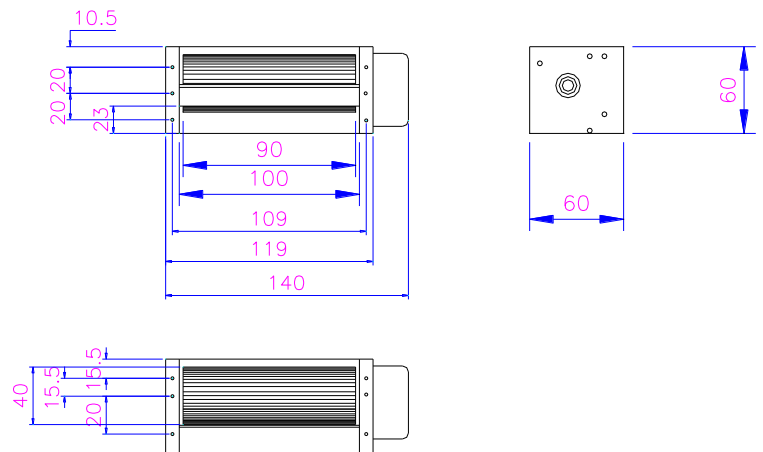

规格型号 P/N	电压 Rating Voltage(DC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	噪声 Noise (dBA)
XJH4090-DC12	12	0.27	3.3	S	2700	22	35
XJH4090-DC24	24	0.14	3.3	S	2700	22	35
XJH4090-DC12	12	0.27	3.3	B	2700	22	35
XJH4090-DC24	24	0.14	3.3	B	2700	22	35
47-4090-DC24	24	0.19	4.5	B	3800	30	38
47-4090-DC12	12	0.35	4.2	B	3800	30	38

地址：广东省深圳市龙岗区平湖街道世纪工业区 B 区 2 号

电话：0755-23735300 13828711071 18948738489

传真：0755-89699793

网址：www.fanon.cn